



5000



Video Features:

- Genlock: □ Color Black, SD Composite Sync
- Video Inputs: □ 1 x channel input, BNC
- Video Outputs: □ 1 x channel output, BNC
- Video Standards: □ NTSC/PAL (525/59.94, 625/50)
- Video I/O: □ SDI (Serial Digital Video), SMPTE-259M
- Video Formats: □ MOV, AVI, DPX, Cineon, YUV, TIFF, TGA,
□ □ and many more Stills, Streams and Audio formats
- Codecs: □ 8/10 bit YCbCr, 30/32 bit RGB

Audio Features:

- Digital Audio I/O: □ 6 x input/output,
□ □ □ AES/EBU or Embedded, 24 Bit/48Khz

Control:

- □ RS-422 control
- □ Drastic Front Panel Controller □ □ □ □
- □ Network Control interface

Network:

- □ Gigabit Ethernet

Storage:

- □ Standard external 2GB Fibre Channel connection

Software:

- □ QuickClip/XO (capture/control/playback),
- □ MediaReactor (convert between media file types),
- □ DrasticPreview (VGA screen media player),
- □ Windows XP

Chassis:

- □ Standard 4 rack unit chassis

Power:

- □ 7 amps @ 110v, 3.5 amps @ 220v

Drastic Digital Disk Recorder

Standard Features:

Auto-Proxy

- Create Proxy file concurrent with video capture

Pull-ins and Laybacks

- Frame-accurate control of external devices

Operation Under Control

- Compatible with most Controller devices

PlayLists and TimeCode Space

- Clip- or Time Code-based media sequencing

SpeedLimit Drive Test

- Confirm storage performance/bandwidth

MediaReactor

- Automated media file format conversions


DrasticPreview

- VGA Screen media preview utility

Network Access

- Share and manage media across a network

Rear Connectivity Diagram

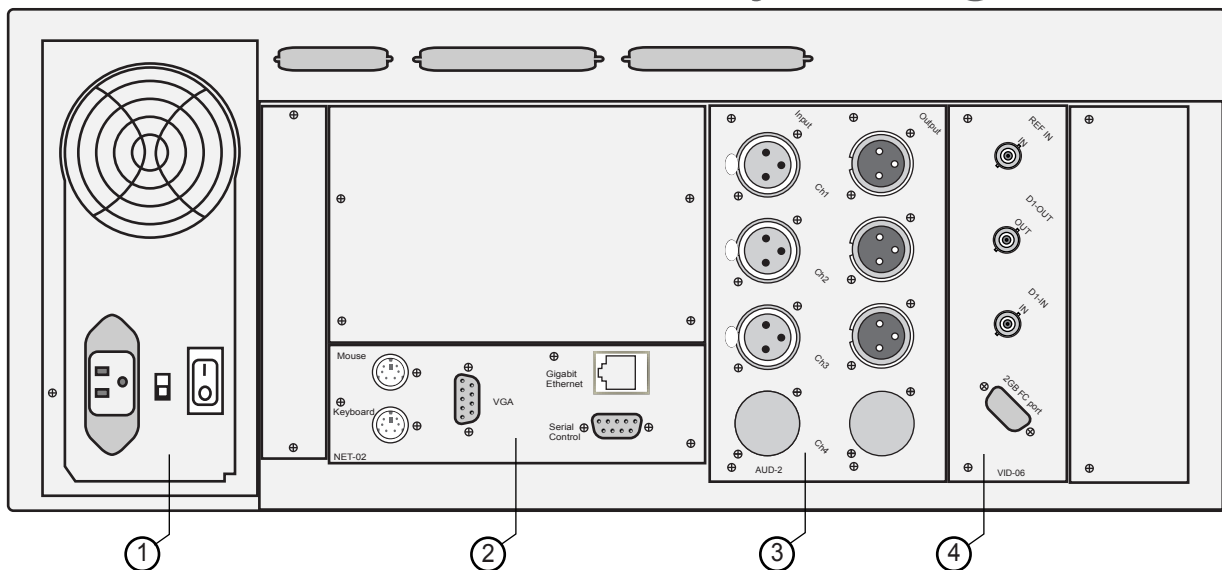

- | | |
|--------------------|--|
| 1. Power: □ □ | Fan, AC Plug, Power Switch & Voltage Selector |
| 2. NET-02 Plate: □ | Mouse, Keyboard, VGA, Gigabit Ethernet, Serial Control |
| 3. AUD-02 Plate: □ | AES/EBU Audio Input/Output channels 1-6 (XLRs) |
| 4. VID-06 pLATE: □ | X-REF IN, D1 IN, D1 OUT (BNCs), Fibre Channel |