



7000-2TB DualLink



Video Features:

- Genlock: Color Black, SD Composite Sync,
- Bi- or Tri-level HD Composite Sync, BNC
- Video Inputs: 1 x channel input (single or dual link), BNC
- Video Outputs: 1 x channel output (single or dual link), BNC
- Video Standards: HD 1080i-50/59.94/60, 1080psf-23.98/24,
- 1080p-23.98/24/25/29.97/30, 720p-59.94/60
- NTSC/PAL (525/59.94, 625/50)
- Video I/O: HD-SDI or SDI (Serial Digital Video),
- SMPTE-292M/ SMPTE-259M
- Video Formats: MOV, AVI, DPX, Cineon, YUV, TIFF, TGA
- and many more Stills, Streams and Audio formats
- Codecs: 8/10 bit YCbCr, 30/32 bit RGB

Audio Features:

- Digital Audio I/O: 6 x input/output,
- AES/EBU or Embedded, 24 Bit/48Khz

- Control: RS-422 control
- Network Control interface

- Network: Gigabit Ethernet

- Storage: 2TB internal media storage drives

- Software: QuickClip/XO (capture/control/playback),
- MediaReactor (convert between media file types),
- DrasticPreview (VGA screen media player),
- Windows XP

- Chassis: Standard 3RU chassis - 27" x 19" x 5.25"

- Power: 9 amps @ 110v, 4.5 amps @ 220v
- 650W 2+1 hot-swap redundant PSU

Drastic Digital Disk Recorder

Standard Features:

Auto-Proxy

- Create Proxy file concurrent with video capture

Pull-ins and Laybacks

- Frame-accurate control of external devices

Operation Under Control

- Compatible with most Controller devices

PlayLists and TimeCode Space

- Clip- or Time Code-based media sequencing

SpeedLimit Drive Test

- Confirm storage performance/bandwidth

MediaReactor

- Automated media file format conversions


DrasticPreview

- VGA Screen media preview utility

Network Access

- Share and manage media across a network

Rear Connectivity Diagram

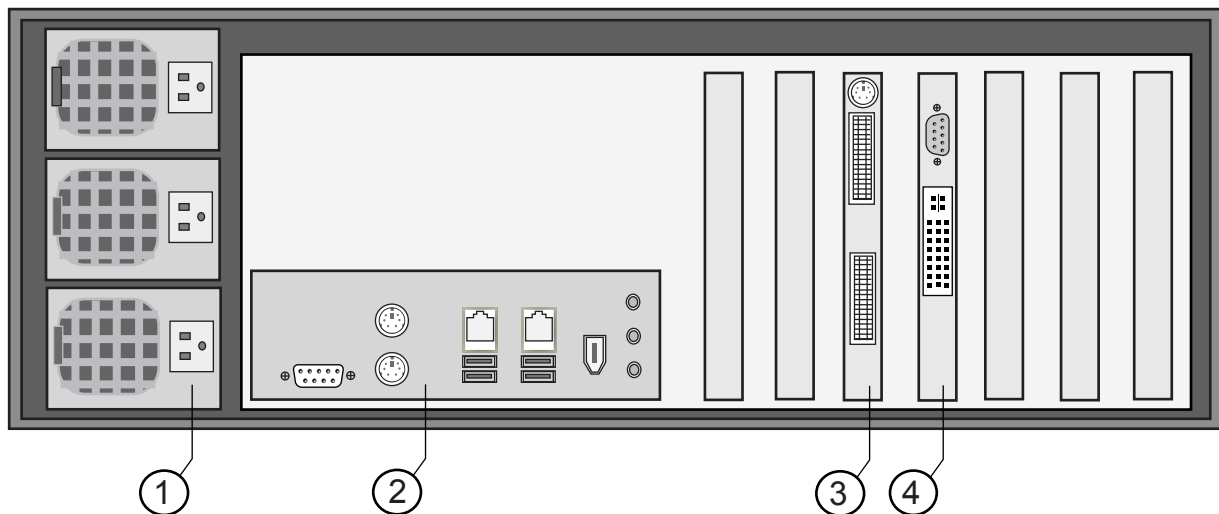

- | | |
|---|--|
| 1. Power: <input type="checkbox"/> <input type="checkbox"/> | 3 x hot-swappable AC Power Supplies |
| 2. Motherboard: <input type="checkbox"/> <input type="checkbox"/> | Keyboard, Mouse, VGA, Gigabit Ethernet, Control port |
| 3. VGA: <input type="checkbox"/> <input type="checkbox"/> | Video output, VGA out 1, VGA out 2 |
| 4. Video Board: <input type="checkbox"/> <input type="checkbox"/> | Video/Genlock Port, AES/EBU Port |